


DTC143XCA DIGITAL TRANSISTOR (NPN)


FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



1. Base (IN) 2. Emitter (GND)
3. Collector (OUT)
SOT-23 Plastic Package

MARKING: X43

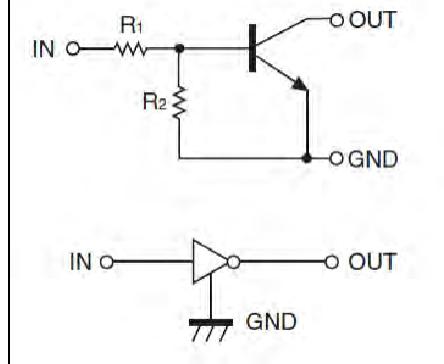

Equivalent Circuit







MAXIMUM RATINGS($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Limits	Unit
V_{cc}	Supply Voltage	50	V
V_{in}	Input Voltage	-7~+20	V
I_o	Output Current	100	mA
P_D	Power Dissipation	200	mW
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(\text{off})}$	$V_{cc}=5V, I_o=100\mu\text{A}$	0.3			V
	$V_{I(\text{on})}$	$V_o=0.3V, I_o=20\text{mA}$			2.5	V
Output voltage	$V_{O(\text{on})}$	$I_o/I_i=10\text{mA}/0.5\text{mA}$		0.1	0.3	V
Input current	I_i	$V_i=5V$			1.8	mA
Output current	$I_{O(\text{off})}$	$V_{cc}=50V, V_i=0$			0.5	μA
DC current gain	G_i	$V_o=5V, I_o=10\text{mA}$	30			
Input resistance	R_i		3.29	4.7	6.11	$k\Omega$
Resistance ratio	R_2/R_1		1.7	2.1	2.6	
Transition frequency	f_T	$V_o=10V, I_o=5\text{mA}, f=100\text{MHz}$		250		MHz




Typical Characteristics

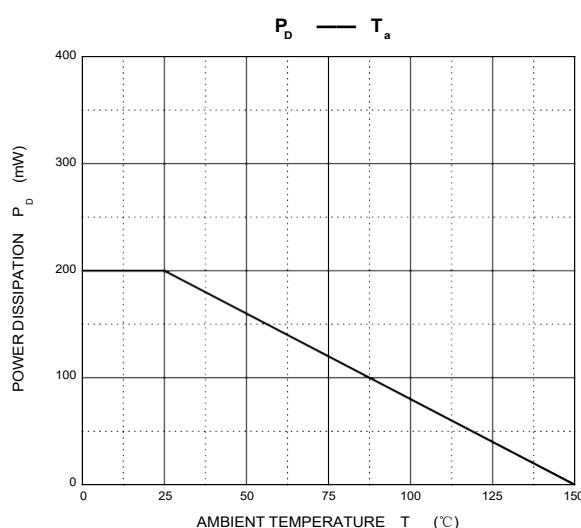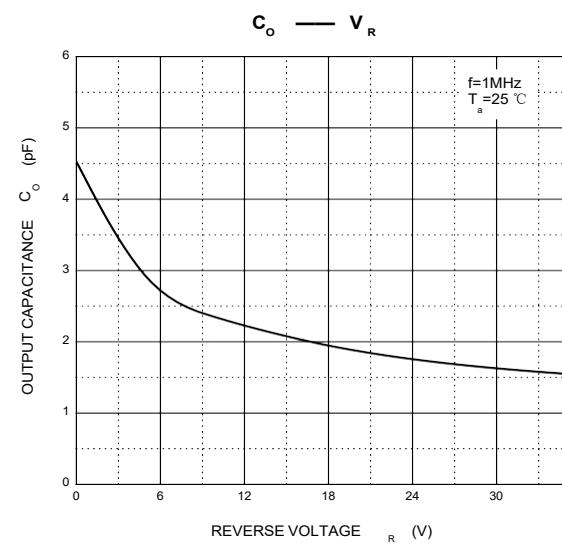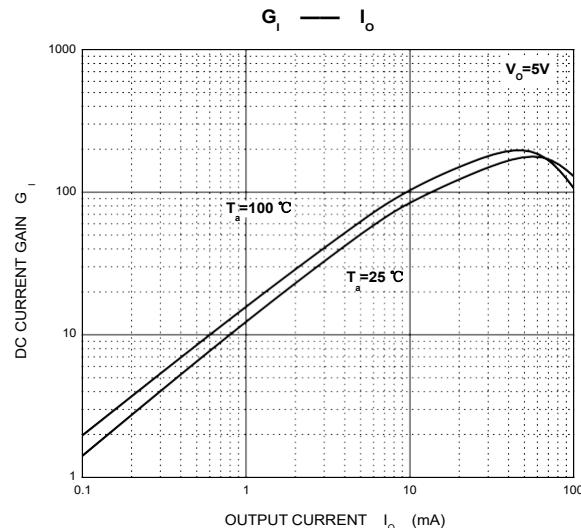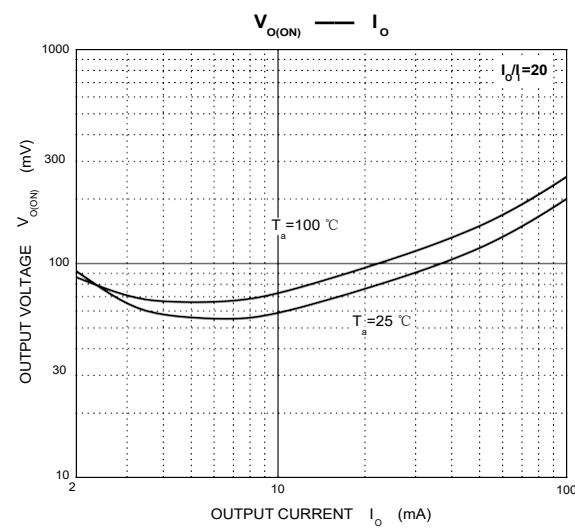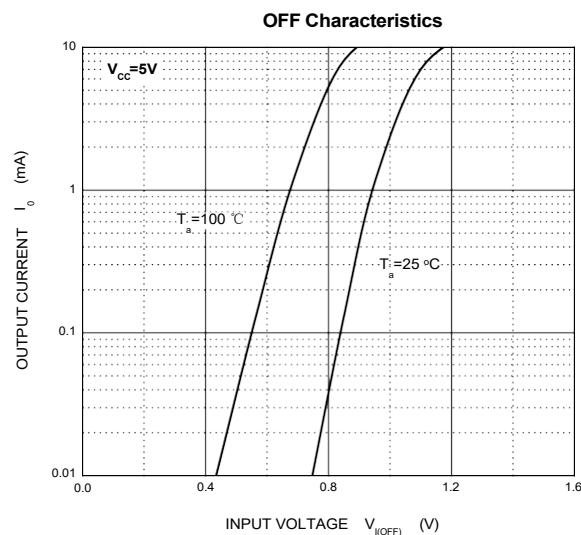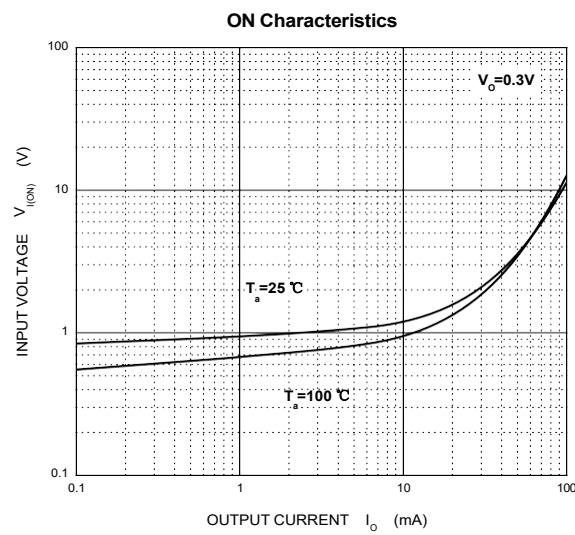

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

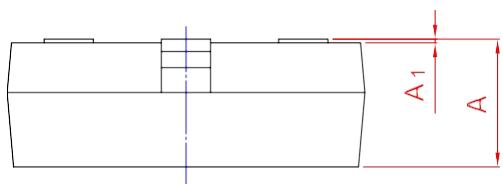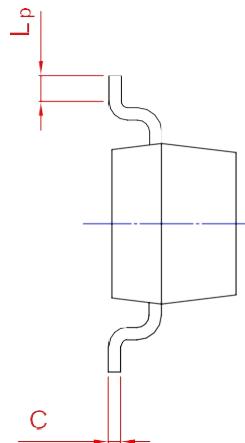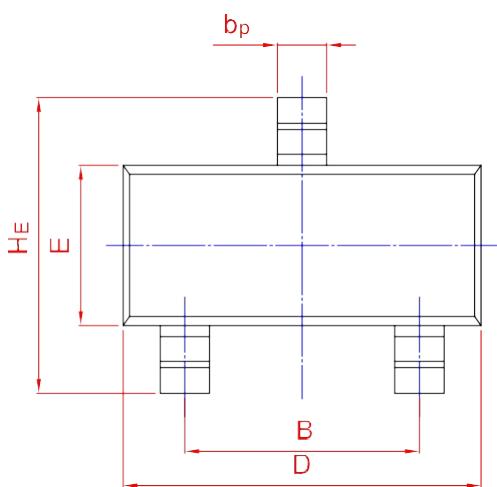

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20