



MMBD4148 / SE / CC / CA Silicon Epitaxial Planar Switching Diode


4148




4148SE



4148CC



4148CA




Marking Code: 5D

Marking Code: A7

Marking Code: A4

Marking Code: A1



SOT-23 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Maximum Repetitive Reverse Voltage	V_{RRM}	100	V
Reverse Voltage	V_R	75	V
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
DC Forward Current	I_{FM}	600	mA
Recurrent Peak Forward Current	I_{FRM}	700	mA
Non-repetitive Peak Forward Surge Current at $t = 1 \text{ s}$ at $t = 1 \mu\text{s}$	I_{FSM}	1 2	A
Total Device Dissipation	P_{tot}	350	mW
Operating Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Voltage at $I_F = 10 \text{ mA}$	V_F	-	1	V
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$ at $I_R = 5 \mu\text{A}$	$V_{(BR)R}$	100 75	- -	V
Reverse Current at $V_R = 20 \text{ V}$ at $V_R = 75 \text{ V}$ at $V_R = 20 \text{ V}, T_a = 150^\circ\text{C}$	I_R	- - -	25 5 50	nA μA μA
Reverse Recovery Time at $I_F = 10 \text{ mA}, V_R = 6 \text{ V}, I_{RR} = 1 \text{ mA}, R_L = 100 \Omega$	t_{rr}	-	4	ns
Total Capacitance at $V_R = 0 \text{ V}, f = 1 \text{ MHz}$	C_T	-	4	pF

Typical Characteristics

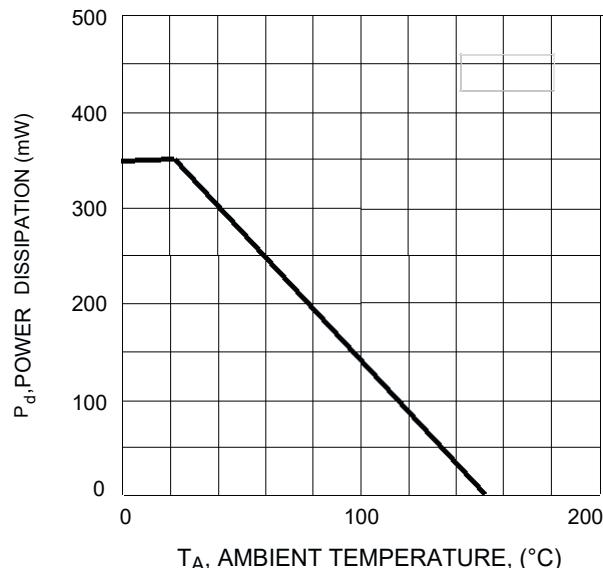


Fig. 1 Power Derating Curve

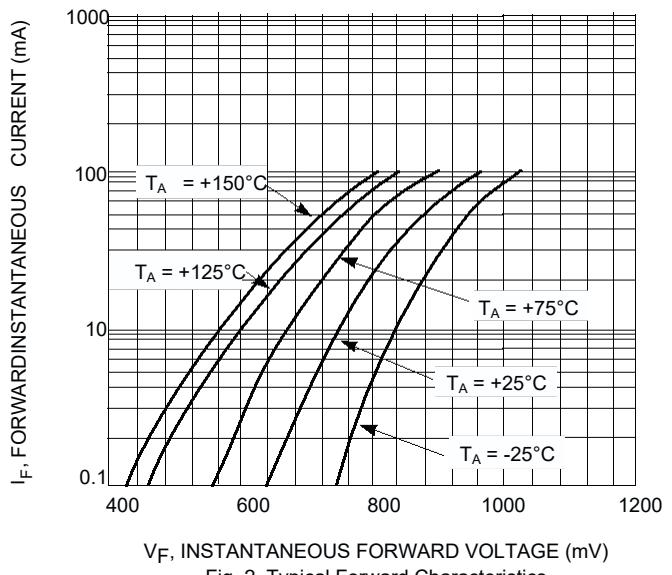


Fig. 2, Typical Forward Characteristics


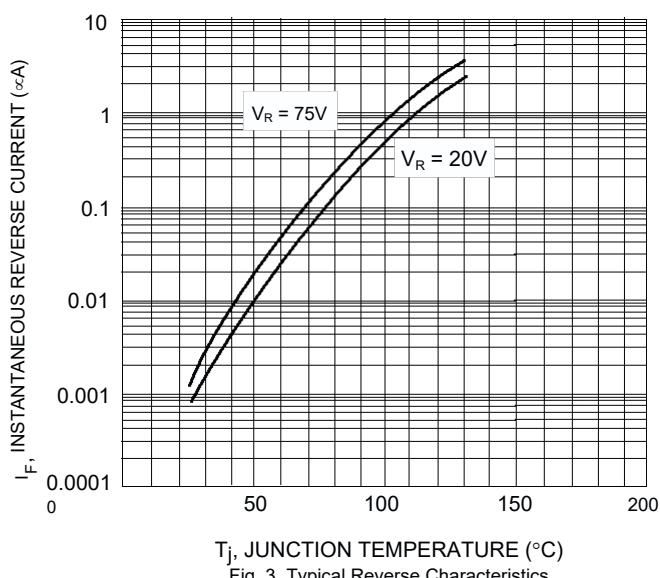


Fig. 3, Typical Reverse Characteristics

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

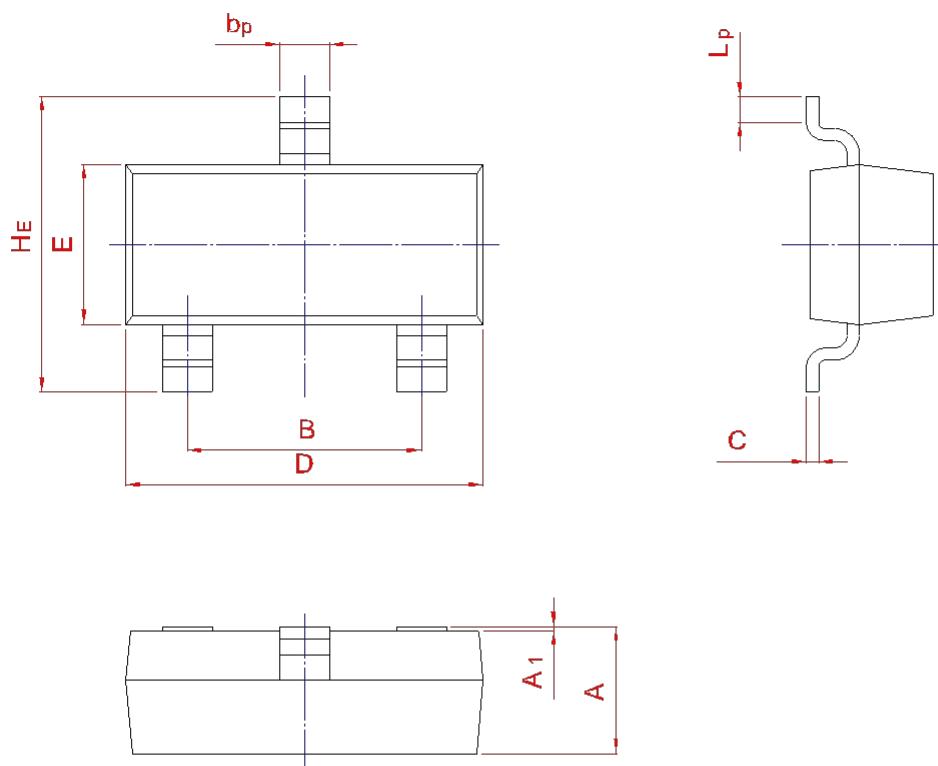

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20