


## MMBT5089 NPN General Purpose Amplifier

For low noise, high gain, general purpose amplifier applications at collector currents from 1 $\mu$ A to 50mA.



MARKING:1R

1.Base 2.Emitter 3.Collector  
SOT-23 Plastic Package






### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Emitter Voltage	$V_{CEO}$	25	V
Collector Base Voltage	$V_{CBO}$	30	V
Emitter Base Voltage	$V_{EBO}$	4.5	V
Collector Current - Continuous	$I_C$	100	mA
Total Device Dissipation Derate above 25°C	$P_{tot}$	300 2.8	mW mW/°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	°C/W
Operating and Storage Junction Temperature Range	$T_J, T_S$	-55 to +150	°C

**Characteristics at  $T_{amb}=25^{\circ}\text{C}$** 


Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE}=5\text{V}$ , $I_C=100\mu\text{A}$ at $V_{CE}=5\text{V}$ , $I_C=1\text{mA}$ at $V_{CE}=5\text{V}$ , $I_C=10\text{mA}$	$h_{FE}$	400	1200	-
	$h_{FE}$	450	-	-
	$h_{FE}$	400	-	-
Small Signal Current Gain at $V_{CE}=5\text{V}$ , $I_C=1\text{mA}$ , $f=1\text{KHz}$	$h_{fe}$	450	1800	-
Collector Base Breakdown Voltage at $I_C=100\mu\text{A}$	$V_{(BR)CBO}$	30	-	$\text{V}$
Collector Emitter Breakdown Voltage at $I_C=1\text{mA}$	$V_{(BR)CEO}$	25	-	$\text{V}$
Collector Emitter Saturation Voltage at $I_C=10\text{mA}$ , $I_B=1\text{mA}$	$V_{CEsat}$	-	0.5	$\text{V}$
Base Emitter On Voltage at $I_C=10\text{mA}$ , $V_{CE}=5\text{V}$	$V_{BEon}$	-	0.8	$\text{V}$
Collector Cutoff Current at $V_{CB}=15\text{V}$	$I_{CBO}$	-	50	$\text{nA}$
Emitter Cutoff Current at $V_{EB}=3\text{V}$ at $V_{EB}=4.5\text{V}$	$I_{EBO}$	-	50	$\text{nA}$
	$I_{EBO}$	-	100	$\text{nA}$
Gain Bandwidth Product at $V_{CE}=5\text{V}$ , $I_C=500\mu\text{A}$ , $f=20\text{MHz}$	$f_T$	50	-	$\text{MHz}$
Collector Base Capacitance at $V_{CB}=5\text{V}$ , $f = 100\text{KHz}$	$C_{cb}$	-	4	$\text{pF}$
Emitter Base Capacitance at $V_{BE}=0.5\text{V}$ , $f = 100\text{KHz}$	$C_{eb}$	-	10	$\text{pF}$
Noise Figure at $V_{CE}=5\text{V}$ , $I_C=100\mu\text{A}$ , $R_s=10\text{K}\Omega$ , $f = 10\text{Hz}$ to $15.7\text{KHz}$	NF	-	2	$\text{dB}$

## Typical Characteristics

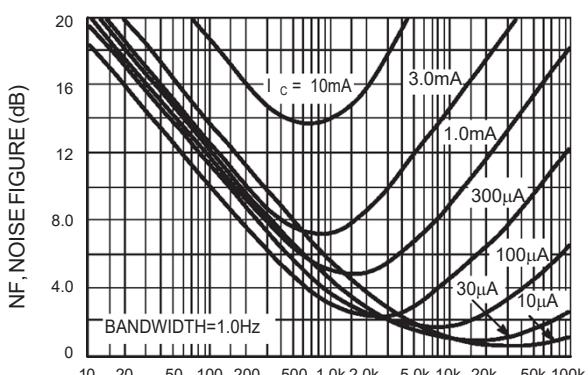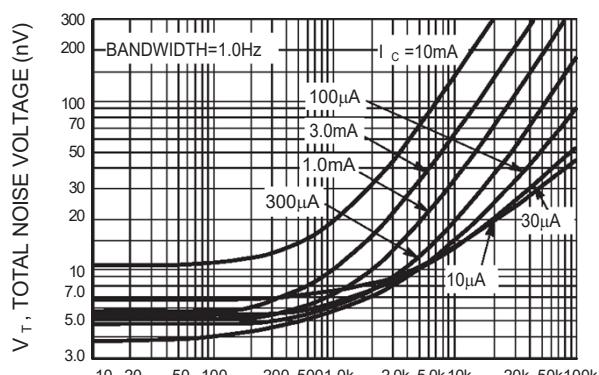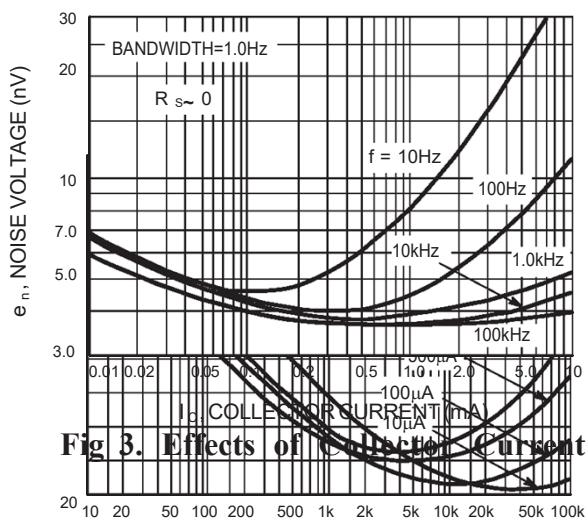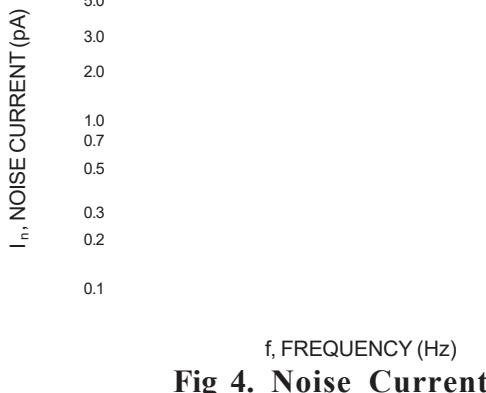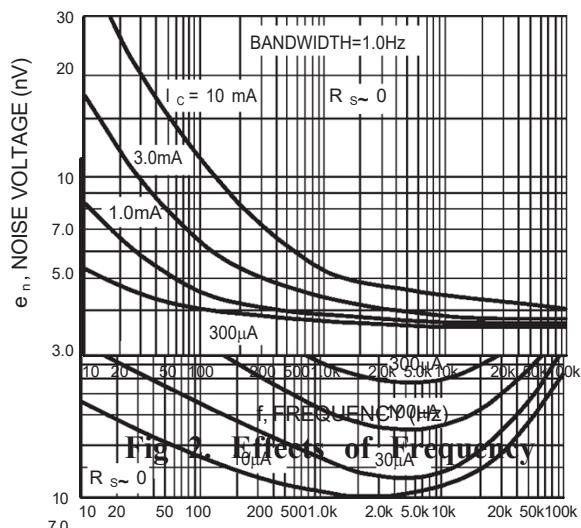


## Typical Characteristics


---

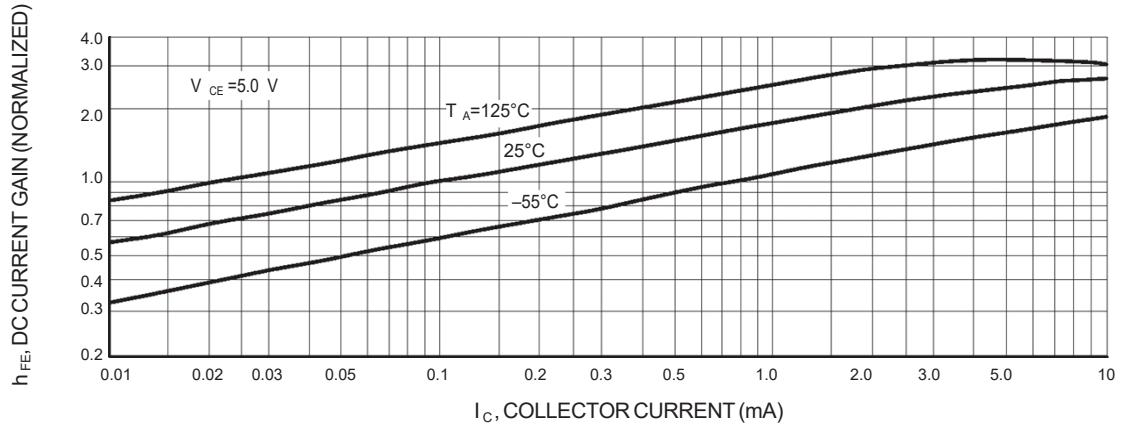


**Fig 8. DC Current Gain**

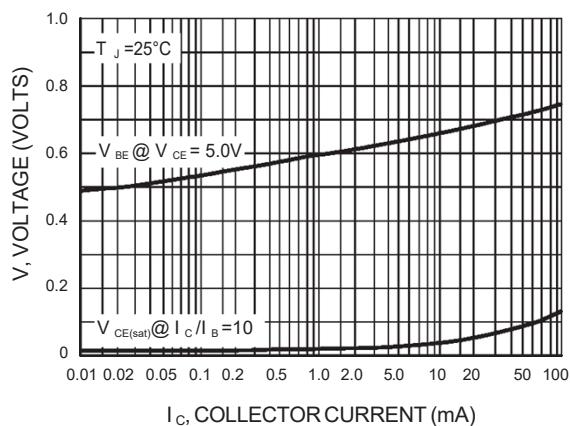


**Fig 9. "On" Voltages**

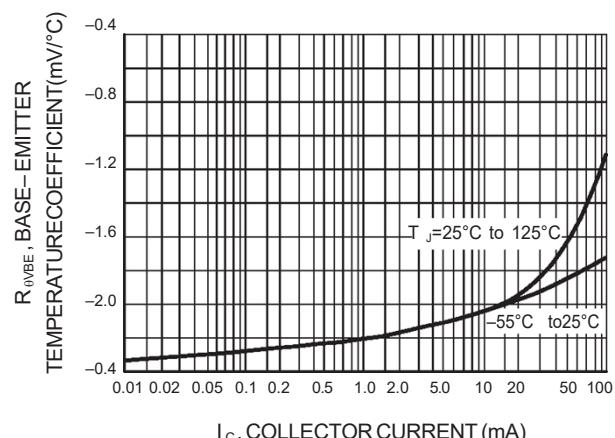

**Fig 10. Temperature Coefficients**

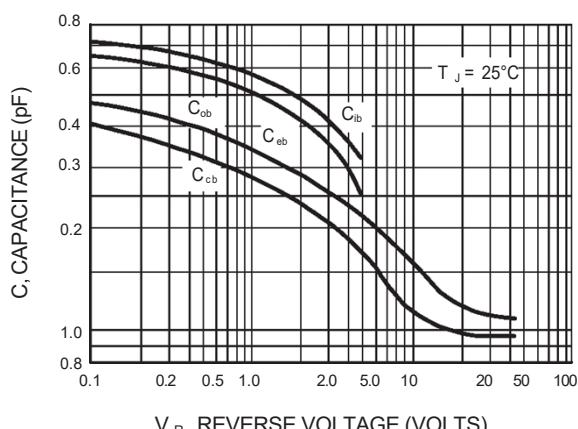

**Fig 11. Capacitance**

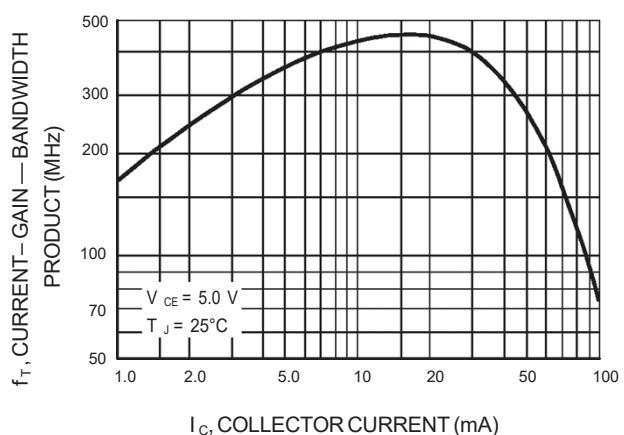


**Fig 12. Current-Gain - Bandwidth Product**

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

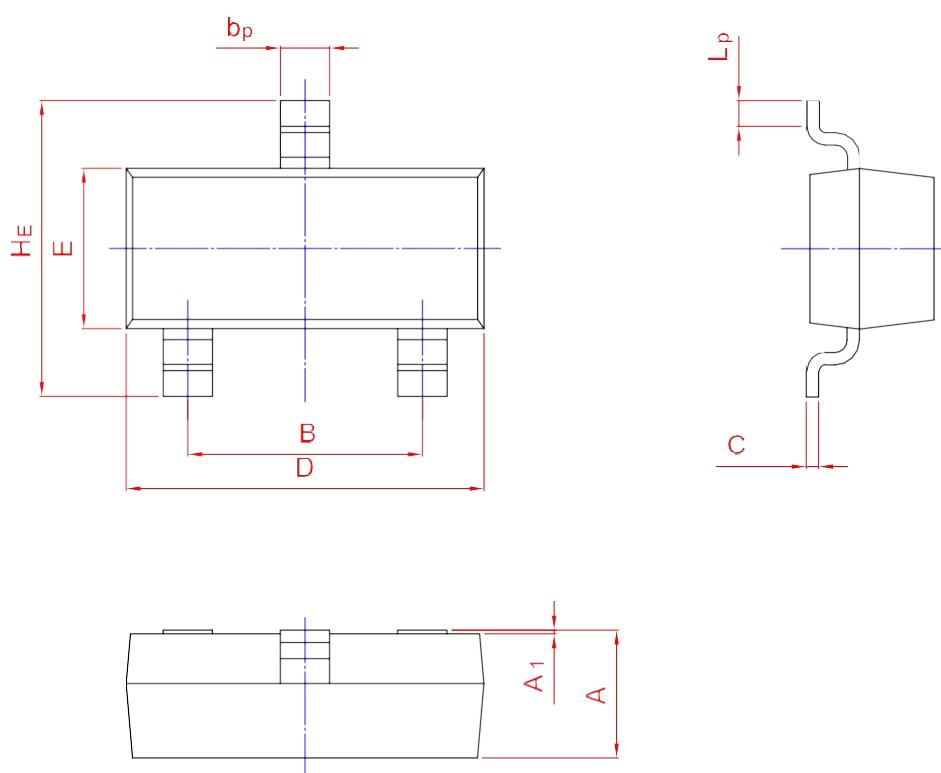

UNIT	A	B	$b_p$	C	D	$E$	$H_E$	$A_1$	$L_p$
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20