

SOT-23 Plastic-Encapsulate Voltage Regulators

79L15 Three-terminal positive voltage regulator

FEATURES

Maximum Output current I_O : 0.1 A

Output voltage V_O : -15 V

Continuous total dissipation P_D : 0.35 W ($T_a=25^\circ C$)



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)


| Parameter | Symbol | Value | Unit |
|--------------------------------------|--------|---------|------|
| Input Voltage | VI | -35 | V |
| Operating Junction Temperature Range | TOPR | 0-150 | °C |
| Storage Temperature Range | TSTG | -65-150 | °C |

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=-23V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit | |
|--------------------------|----------------|-------------------------------------|---------|--------|-------|--------|----|
| Output voltage | Vo | | 25°C | -14.4 | -15.0 | -15.6 | V |
| | | -17.5V≤Vi≤-30V, $I_o=1mA \sim 40mA$ | 0-125°C | -14.25 | -15.0 | -15.75 | V |
| | | $I_o=1mA \sim 70mA$ | | -14.25 | -15.0 | -15.75 | V |
| Load Regulation | ΔVo | $I_o=1mA \sim 100mA$ | 25°C | | 25 | 150 | mV |
| | | $I_o=1mA \sim 40mA$ | 25°C | | 15 | 75 | mV |
| Line regulation | ΔVo | -17.5V≤Vi≤-30V | 25°C | | 65 | 300 | mV |
| | | -19V≤Vi≤-30V | 25°C | | 50 | 250 | mV |
| Quiescent Current | Iq | | 25 | | 6.5 | mA | |
| Quiescent Current Change | ΔIq | -19V≤Vi≤-30V | 0-125°C | | 1.5 | mA | |
| | ΔIq | $1mA \leq I_o \leq 40mA$ | 0-125°C | | 0.1 | mA | |
| Output Noise Voltage | V _N | 10Hz≤f≤100KHz | 25°C | | 90 | μV | |
| Ripple Rejection | RR | -18.5V≤Vi≤-28.5V, f=120Hz | 0-125°C | 34 | 39 | dB | |
| Dropout Voltage | Vd | | 25°C | | 1.7 | V | |







* Pulse test.

TYPICAL APPLICATION

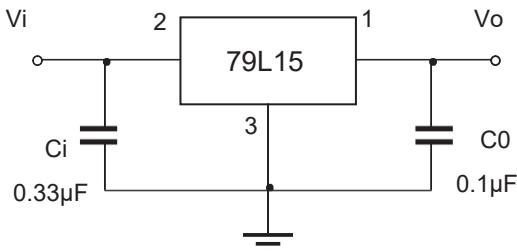

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


Typical Characteristics

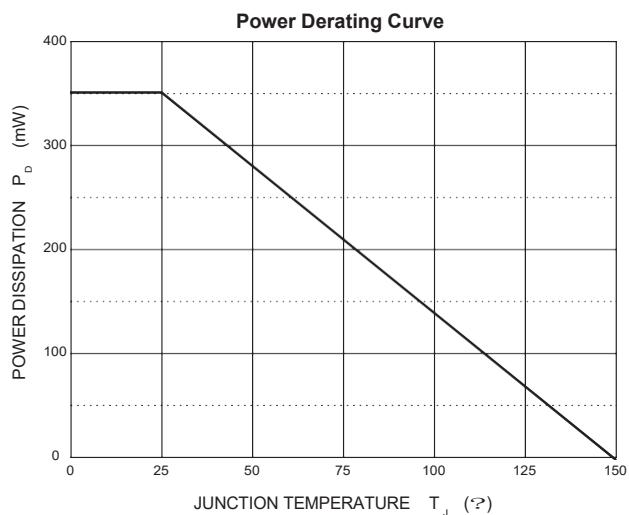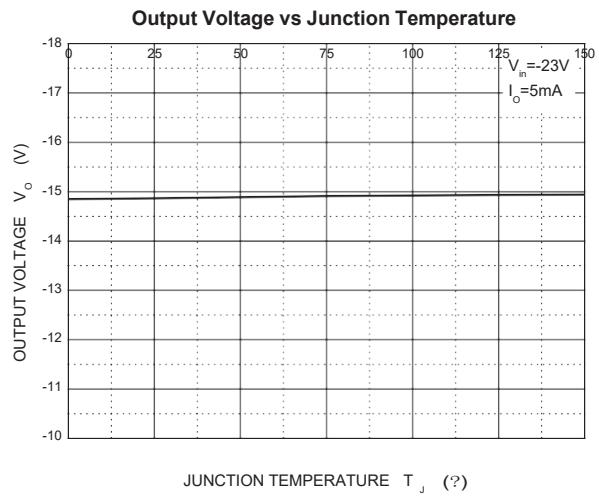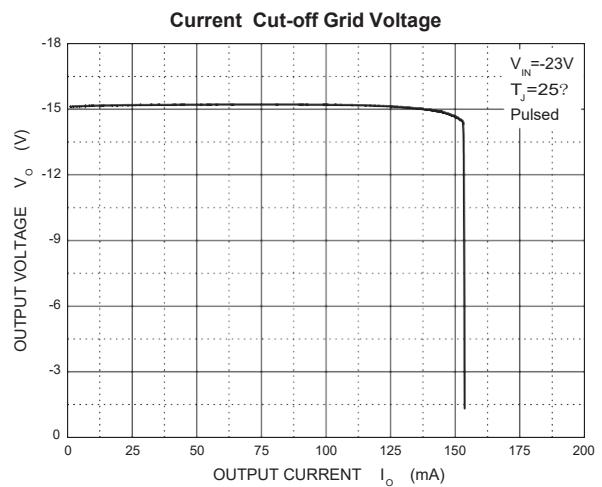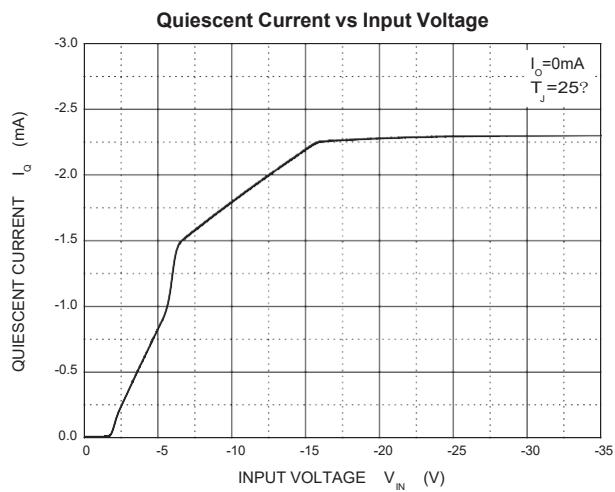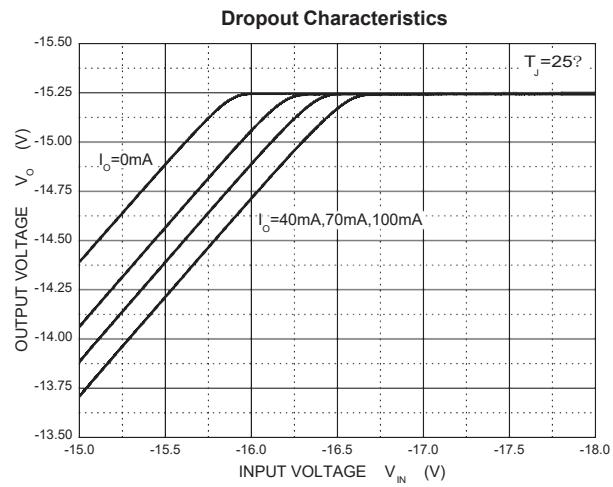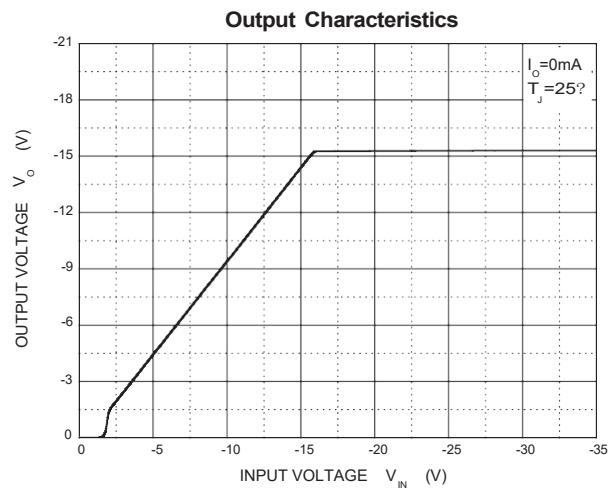

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

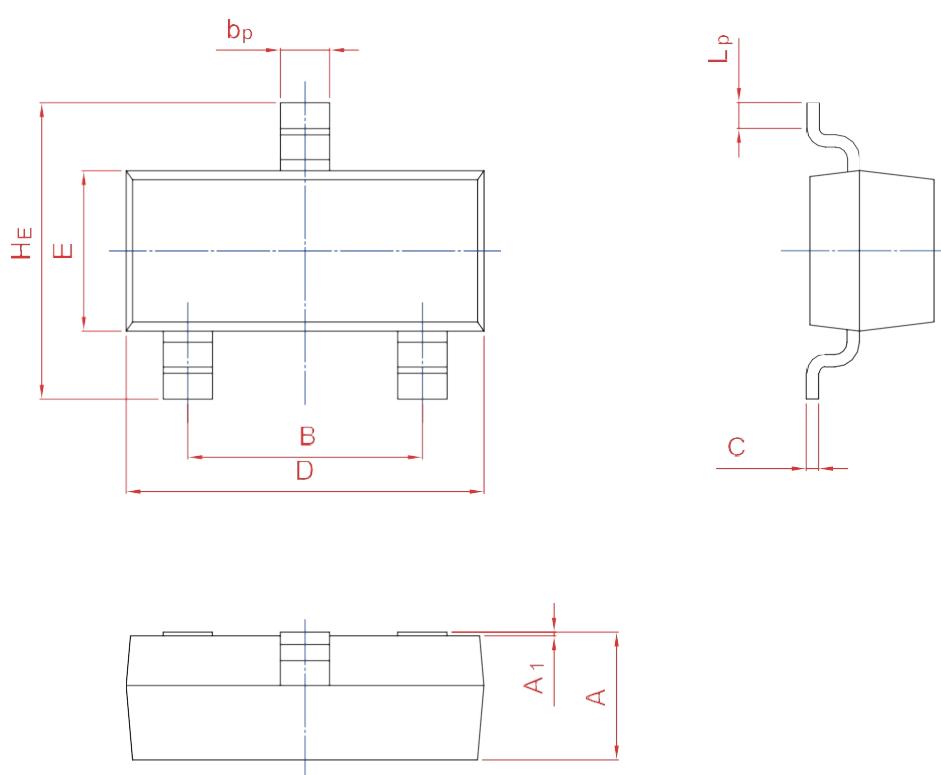

| UNIT | A | B | b_p | C | D | E | H_E | A_1 | L_p |
|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|----------------|--------------|
| mm | 1.40 0.95 | 2.04 1.78 | 0.50 0.35 | 0.19 0.08 | 3.10 2.70 | 1.65 1.20 | 3.00 2.20 | 0.100 0.013 | 0.50 0.20 |